

# ECO.36+<sup>+</sup>/T

## Magnetic drilling machine

**EUROBOOR**

FOR PROFESSIONALS BY PROFESSIONALS

### Technical data

	Metric	Imperial
Annular cutting	Ø 12 - 36 mm	7/16" - 1 7/16"
Twist drilling (Weldon)	Ø 1 - 14 mm	1/16" - 9/16"
Countersinking	Ø 10 - 40 mm	3/8" - 1 9/16"
Tapping	Ø M3 - M10	1/8" - 1 3/9"
In-corner drilling	0°: 50 mm	2"
	90°: 53 mm	2 1/16"
	45°: 60 mm	2 3/8"
Length	310 mm	12 3/16"
Width	135 mm	5 5/16"
Height	165 mm	6 1/2"
Stroke	40 mm	1 9/16"
Weight*	10.3 kg	22.7 lbs
Magnet (l x w x h)	160 x 80 x 37 mm	6 5/16" x 3 1/8" x 1 7/16"
Magnetic force	1,200 kg	2,645 lbs
Motor power	1,050 W	8.5 A (110 V / 60 Hz)
Total power	1,100 W	9 A (110 V / 60 Hz)
Speed		120 - 500 rpm
(no load)		
Speed		120 - 400 rpm
(load 1,050 W, 8.5 A)		
Spindle (Weldon)	19.05 mm	3/4"
Voltage		110 - 120 V / 60 Hz 220 - 240 V / 50 - 60 Hz

\* Without power cord and handle

### Features



Adjustable speed



R/L rotation



Power surge protection



Power fluctuation protection



Gyro-Tec



Automatic shut-off



Carbon brush wear indicator



Magnet LED-indicator (SensorTec)






In-corner: 50 mm (2")



Height: 165 mm (6 1/2")



Tapping

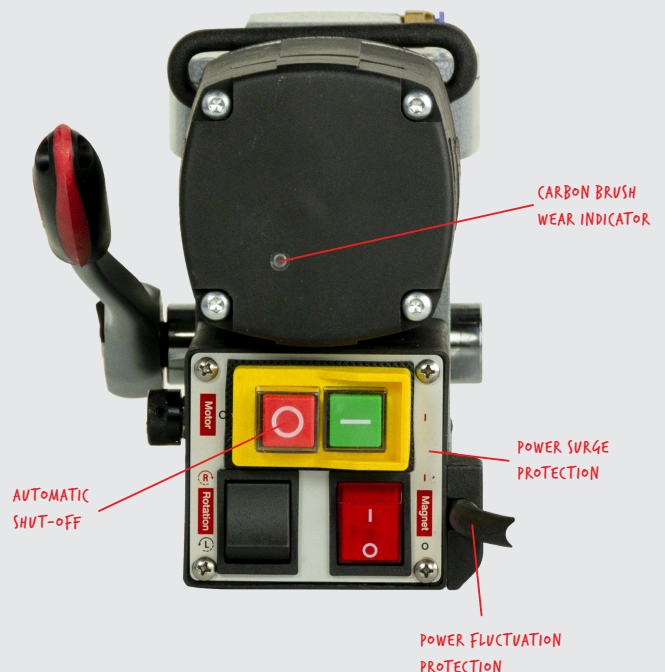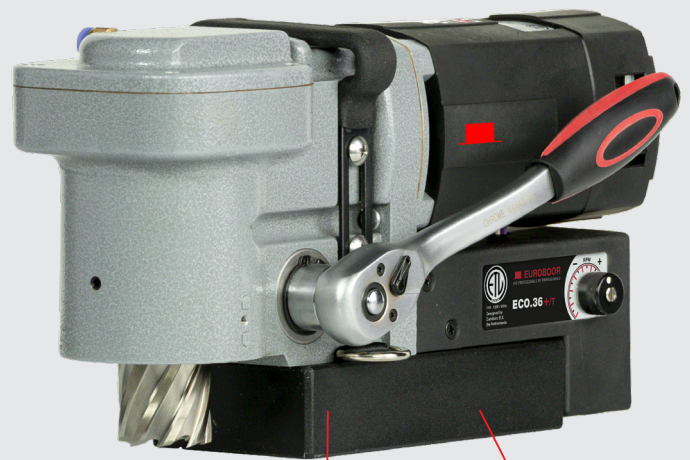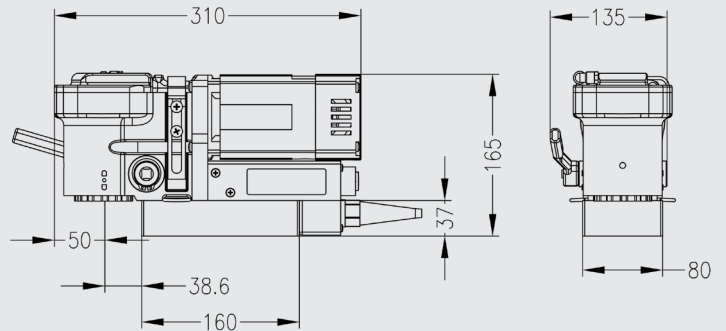

Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:



[www.euroboor.com](http://www.euroboor.com)